

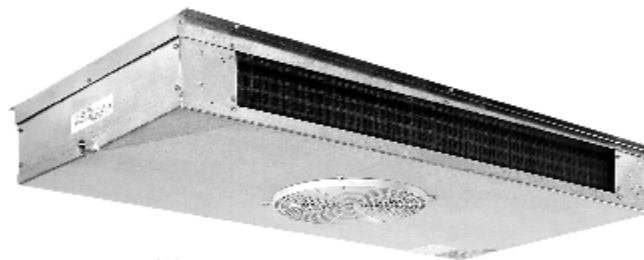


SRC REFRIGERATION

6615 Nineteen Mile Road
Sterling Heights, MI 48314-2117
(586) 254-0610
TOLL FREE 1-800-521-0398
Fax: (586) 254-0485

FLORAL APPLICATION

ASHRAE SYSTEM SPEC [®]
FLORAL APPLICATION – INDOOR USE
Walk-in Display and Storage Coolers
FW SERIES

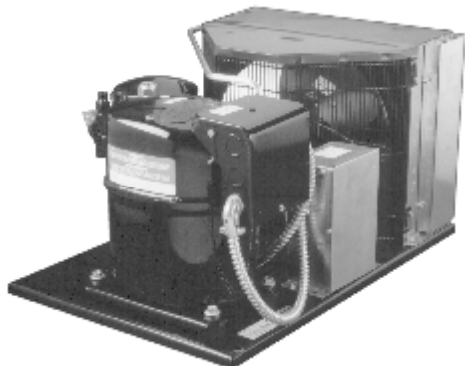

UL LISTED INDOOR HERMETIC CONDENSING UNIT
Capacity BTU/HR at 95° ambient / 25° suction
Refrigerant: R-404A
(Specify phase when ordering)

UL LISTED "SURROUND-AIR"[™] EVAPORATOR COIL
TWO-WAY AIR DISCHARGE
"Surround-Air" (U.S. Patent & Trademark office registration #2,377,379)
Capacity BTU/HR at 10° TD
All units 115v, 1ph 1/4" ODS external equalizer and
3/4" F.P.T. drain

System	HP	Capacity BTU/HR	System TD	Minimum Circuit AMP			Coil Dimensions		# Evap Coil(s)	BTU @ Coil	Coil Lbs.
				115v 1ph	208/230v1ph	208/230v3ph	L.	W			
FW050	1/2	5,180	9.96	14.8	7.6	N/A	31½	28¾	1	5,200	42
FW075	3/4	7,480	10.28	N/A	9.97	—	75½	28¾	1	7,500	103
FW075C	3/4	7,480	9.84	—	9.97	—	53½	28¾	1	7,600	64
FW100	1¼	9,340	9.34	—	11.7	8.8	75½	28¾	1	10,000	106
FW150	1½	12,500	9.61	—	16.5	12.2	75½	28¾	1	13,000	145
FW150-2	1½	12,500	8.33	—	16.5	12.2	75½	28¾	2	7,500	103
FW200	2	16,100	10.38	—	15.9	11.7	75½	28¾	1	15,500	160
FW200-2	2	16,100	10.73	—	15.9	11.7	75½	28¾	2	7,500	103
FW300	3	23,800	8.81	—	25.8	18.8	97½	28¾	1	27,000	200
FW300-2	3	23,800	9.15	—	25.8	18.8	75½	28¾	2	13,000	145
FW400-2	4	37,800	10.5	—	33.5	23.1	75½	28¾	2	18,000	160
FW400-3	4	37,800	9.69	—	33.5	23.1	75½	28¾	3	13,000	145
FW500-2	5	41,200	9.80	—	42.0	27.0	97½	28¾	3	21,000	193
FW500-3	5	41,200	8.86	—	42.0	27.0	75½	28¾	3	15,500	149

ABOVE SYSTEM INCLUDES THE FOLLOWING REFRIGERATION CONTROLS

Factory Installed on Condensing Unit:

- n High efficiency Copeland Compressor
- n Air cooled condenser with PSC fan motor
- n Liquid & suction service valves
- n Low pressure control factory mounted
- n Liquid receiver

Equipment Warranties:

- n 5 Year Compressor Motor
- n 1 Year Parts

Additional Items Shipped Loose:

- n Sporlan expansion valve(s) - sweat connections
- n Sporlan liquid line filter / drier & sight glass
- n Room thermostat (mechanical)
- n Solenoid valve & coil, 1HP and above only

Available Options:

- n Air-defrost timer
- n Suction filter
- n Electronic room thermostat